



2253 FT VACUUM BELT FOR CAN MAKING

TARGET INDUSTRIES:

CAN MAKING & BEVERAGE INDUSTRY

The product is specially designed for the can making industries. Cans can be conveyed vertically whilst the vacuum keeps them in position. Also on conveyors where maximum can stability is required the vacuum can contribute to optimum line performance.

In the beverage industry this belt can be used for empty can conveyors, especially when empty cans are transferred from one conveyor to the next by vacuum, to eliminate down cans from the flow.

DESIGN ADVANTAGES


- Engineered position and size and style of holes for optimum product handling.

MATERIAL ADVANTAGES

- Average service life: +60%
- Lower friction
- Less noise
- Less dust
- Increased PV limit
- Higher speed without lubrication
- Resistant to 120 C in air



- Longer life
- Lower friction
- Good chemical resistance
- High abrasion resistance
- Approved for direct food contact
- Less dust than with acetal chains

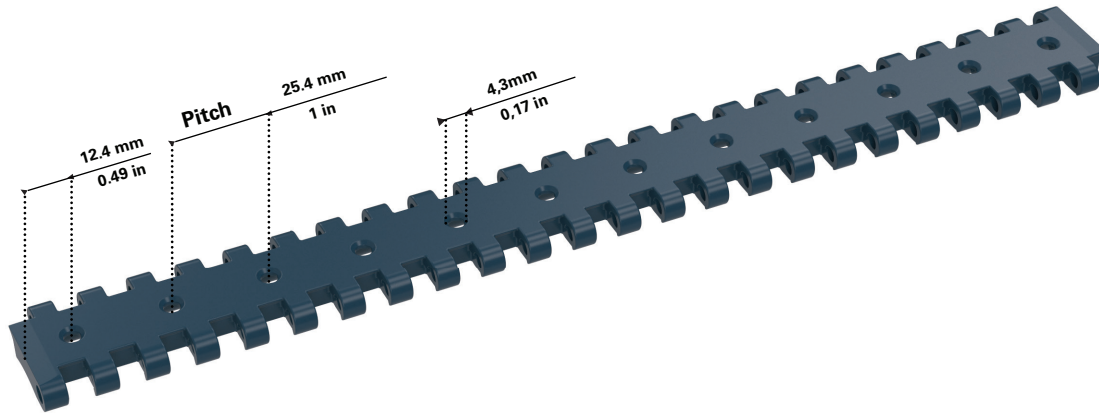

What **if**

you could have both energy savings and longer chain life ?

Nolu-S® & NG EVO™ combination helps you achieve sustainability and total cost of ownership goals. NGevo material can double the wear life of your chain and modular plastic belts compared to commonly applied plastic materials*. It also expands the options for dry running conveying.

*LF Acetal material

Nolu-S® is a unique component of UHMW-PE and a solid lubricant.

It provides a lower coefficient of friction while maintaining the characteristics of UHMW-PE

**SYSTEM
PLAST™**

System Plast S.R.L.

Via Guareschi, nr. 2, 24060 Telgate (BG)
 Customer Service: +39 035. 835 1301
 Fax: +39 053. 835 1399
 E-mail: info@systemplast.com
 www.RegalPTS.com

APPLICATION CONSIDERATIONS

The proper selection and application of power transmission products and components, including the related area of product safety, is the responsibility of the customer. Operating and performance requirements and potential associated issues will vary appreciably depending upon the use and application of such products and components. The scope of the technical and application information included in this publication is necessarily limited. Unusual operating environments and conditions, lubrication requirements, loading supports, and other factors can materially affect the application and operating results of the products and components and the customer should carefully review its requirements. Any technical advice or review furnished by Regal Beloit America, Inc. and its affiliates with respect to the use of products and components is given in good faith and without charge, and Regal assumes no obligation or liability for the advice given, or results obtained, all such advice and review being given and accepted at customer's risk.

For a copy of our Standard Terms and Conditions of Sale, Disclaimers of Warranty, Limitation of Liability and Remedy, please contact Customer Service at 1-800-626-2120. These terms and conditions of sale, disclaimers and limitations of liability apply to any person who may buy, acquire or use a Regal Beloit America Inc. product referred to herein, including any person who buys from a licensed distributor of these branded products.

System Plast and Regal are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2016 Regal Beloit Corporation, All Rights Reserved. MCB16075E • Form# 10050E •

WIDTH (in)	PRODUCT DESCRIPTION
12	NGE2253FT-K1200VAC43
15	NGE2253FT-K1500VAC43
18	NGE2253FT-K1800VAC43
21	NGE2253FT-K2100VAC43
24	NGE2253FT-K2400VAC43
27	NGE2253FT-K2700VAC43
30	NGE2253FT-K3000VAC43
33	NGE2253FT-K3300VAC43
36	NGE2253FT-K3600VAC43
39	NGE2253FT-K3900VAC43
42	NGE2253FT-K4200VAC43
45	NGE2253FT-K4500VAC43
48	NGE2253FT-K4800VAC43
51	NGE2253FT-K5100VAC43
54	NGE2253FT-K5400VAC43

